

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 July 2005 (28.07.2005)

PCT

(10) International Publication Number
WO 2005/069709 A1

(51) International Patent Classification⁷: **H05K 5/00**

(21) International Application Number:
PCT/EP2004/012481

(22) International Filing Date:
4 November 2004 (04.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04300020.7 14 January 2004 (14.01.2004) EP

(71) Applicant (for all designated States except US): **THOMSON LICENSING S.A.** [FR/FR]; 46 Quai A. le Gallo, F-92100 Boulogne-Billancourt (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TEY, Tiam, Fatt** [MY/SG]; Blk 63 Hume Ave, #09-01 Hillview Green, Singapore 598742 (SG). **LUM, Lye, Yoong** [SG/SG]; Blk 142

Serangoon Nth Ave 1, #01-313, Singapore 550142 (SG). **LIN, Feng** [CN/SG]; Blk 527 #07-103, Jelapang Road, Singapore 670527 (SG).


(74) Agent: **ROSSMANITH, Manfred**; Deutsche Thomson-Brandt GmbH, European Patent Operations, Karl-Wiechert-Allee 74, 30625 Hannover (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: RF CIRCUIT WITH STACKED PRINTED CIRCUIT BOARDS

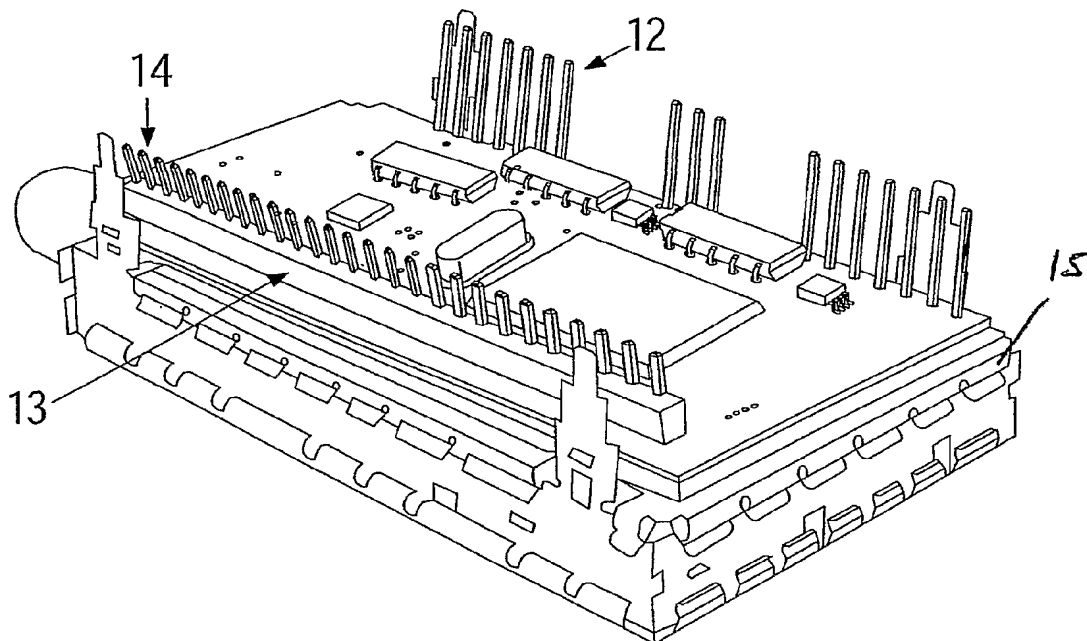

(57) Abstract: An RF unit comprises a tuner, a demodulator and a mixer. At least the tuner and the mixer are disposed on separate first and second substrates. The RF unit further comprises a housing accommodating the first and second substrates. The first substrate and the second substrate are arranged on different levels inside the housing and maintain a predetermined distance between each other.

WO 2005/069709 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.